

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization International Bureau



(43) International Publication Date  
12 May 2005 (12.05.2005)

PCT

(10) International Publication Number  
**WO 2005/042986 A1**

(51) International Patent Classification<sup>7</sup>: F16B 21/08,  
19/00, 15/06

(74) Agent: GARSTKA, Antoni; Tumlin-Wegle 87,  
PL-26-050 Zagnansk (PL).

(21) International Application Number:  
PCT/PL2004/000089

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(22) International Filing Date: 29 October 2004 (29.10.2004)

(25) Filing Language: English

(26) Publication Language: English


(30) Priority Data:  
P.363213 30 October 2003 (30.10.2003) PL  
P.363421 9 November 2003 (09.11.2003) PL  
P.367327 16 April 2004 (16.04.2004) PL

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI,

(71) Applicant and  
(72) Inventor: WESOŁOWSKA, Małgorzata [PL/PL]; ul. Kosciuszki 17, PL-25-316 Kielce (PL).

[Continued on next page]

(54) Title: FASTENING PIN

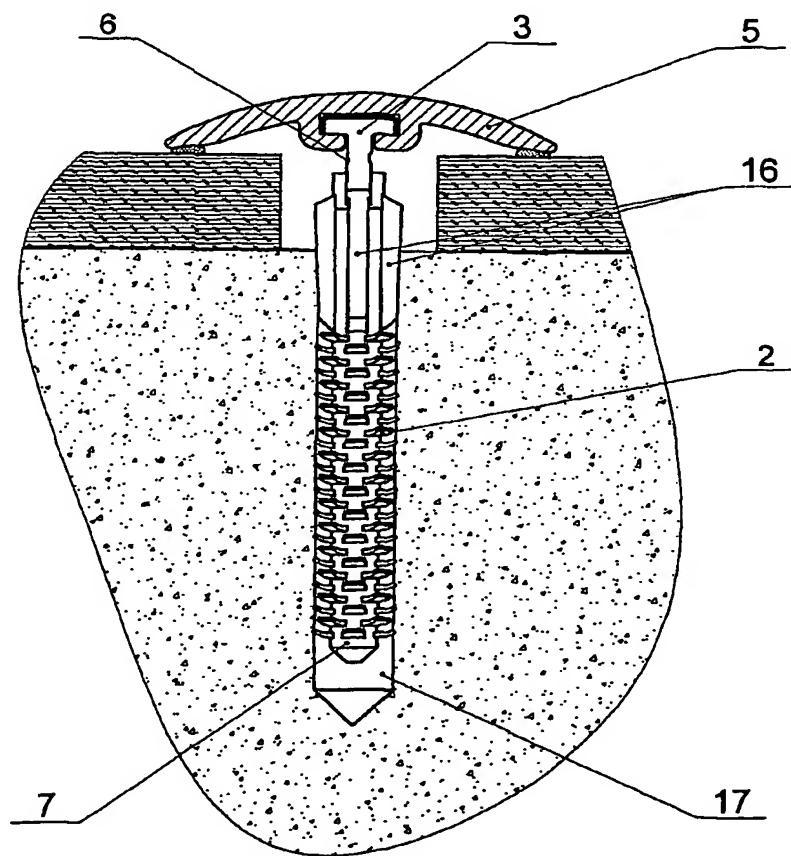

(57) Abstract: A fastening pin (1) characterized by that it is equipped with elastic protrusions (2) preferably in the shape of convergent geometric figures, placed round the core, and with outer dimension of the protrusions (2) being greater than the hole dimension. The pin includes a joint (6) between an anchored part and a head (4) being equipped with stabilizing fins (16). The pin (1) is especially suitable for fastening threshold-masking strips.

WO 2005/042986 A1



SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ,  
GW, ML, MR, NE, SN, TD, TG).

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

**Published:**

— *with international search report*